



Bulldog
HOSE COMPANY



RED/YELLOW CHIEF®

Heavy Duty Attack Hose

Bulldog's exclusive heavy-rib outer cover combines with a unique nitrile-PVC rubber through-the-weave construction to provide the backbone of excellent hose performance in Red Chief® & Yellow Chief®. The heavy-rib construction makes the hoses highly resistant to cuts, punctures, and abrasion. Compact and kink resistant, lightweight and easily maneuverable, Red Chief & Yellow Chief are ideally suited to meet the specifications and tough demands of most municipal fire departments. With a proof pressure of 600 PSI (4200 kPa) and a tolerance for heat and cold, these hoses maintain peak performance from temperatures in the range of -36°F to 158°F (-37°C to 70°C).

Red Chief & Yellow Chief hose are virtually maintenance free and require no drying after use. With these powerful hoses, you save time and money, since less backup hose is needed. Red Chief & Yellow Chief are in a class by themselves – clearly superior to traditional attack lines and compliant to the NFPA 1961 standard.

UNIQUE DESIGN FEATURES:

- Heavy-rib construction
- Superior resistance to abrasion, punctures, and cuts
- Unmatched kink resistance
- Compact and lightweight
- High heat resistance
- Easily maneuverable

*Backed by Bulldog's Municipal
Fire Hose Ten-Year Warranty.
bulldoghose.com/resources*



Raise your firefighting standards!

Contact us today: 833.655.9201 · bulldoghose.com

AMERICAN MADE TOUGH.™

FEATURES:

Ultra Lightweight

Lightweight and flexible for easy handling and less working stress.

Best in Class Adhesion

Provides enhanced hose performance and increased hose life.

Superior Abrasion Performance

Nitrile-rubber cover eliminates additional weight issues caused by water pick up during use and greatly increases abrasion resistance, providing a long service life.

Anti-Burst Technology

Hose will not burst catastrophically even with a 1/2" diameter hole through both the jacket and liner.

Low Drag Coefficient

A unique exterior rib design makes it easy to pull during attack operations.

Exceptional Heat Resistance

High heat resistance as exhibited in the BS 6391 Hot Cube Test. Temperature range -36°F to +158°F.

Exceeds Standards

Red Chief® and Yellow Chief® is manufactured to meet or exceed the NFPA 1961 standard.

Listing Options

Agency approvals by UL, ULC, or FM are available on select sizes and colors, inquire for details.


TECHNICAL SPECIFICATIONS:

Size	Standard color	Service	Pressure			Bowl Size	Weight (50'/15M)	Coil Diameter (50'/15M)	
			psi	kpa	Proof			Burst	inch
1-1/2 38 (ULC)	Red/Yellow	300 2100	600 4200	900 6300	1-13/16	14 6.4	14-3/4	375	
1-3/4 45 (ULC)	Red/Yellow	300 2100	600 4200	900 6300	2-1/16	18 8.2	14-3/4	375	
2 50	Red/Yellow	300 2100	600 4200	900 6300	2-5/16	22 10.0	16	406	
2-1/2 65 (ULC)	Red/Yellow	300 2100	600 4200	900 6300	2-7/8	26 11.8	16-1/2	419	
3 75	Red/Yellow	300 2100	600 4200	900 6300	3-13/32	30 13.6	16-1/2	419	

BullDog Hose Company maintains ongoing product improvement and development programs. Therefore BullDog reserves the right to modify any product or specification without prior notice. If necessary, please contact BullDog Hose Company customer service to ensure that all claims and technical data are current.



INNER HOSE REINFORCED BY 100% SYNTHETIC CIRCULAR WOVEN MATERIAL PROVIDES ANTI-BURST PROTECTION

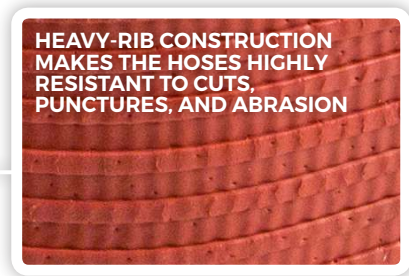

HEAVY-RIB CONSTRUCTION MAKES THE HOSES HIGHLY RESISTANT TO CUTS, PUNCTURES, AND ABRASION

